

Acoustic wall – WP-A

Visible mounting


Standard DESIGN AND SURFACES

Coil-coated, hot-dip galvanised steel sheet


EXTERIOR:	<ul style="list-style-type: none">Exposed side 25 µm polyester coating with a PVC protective film (protects against solar radiation). The film must be removed no later than 10 weeks after the production date (visible on the longitudinal joint of the panel).Profile 1 = Standard, for other profiles see WP-A profilesMetal gauge: 0.236in (smaller metal gauge on request)
INTERIOR:	<ul style="list-style-type: none">Exposed side 25 µm polyester coating with a PVC protective film (protects against solar radiation). The film must be removed no later than 10 weeks after the production date (visible on the longitudinal joint of the panel).Profile 2Hole proportion: 32.5 %Bore diameter: 1/8in round bore, offset (3/16in distance)Holes: DIN RV 3-5 (R3T5) (730-000)Metal gauge: 0.236in (smaller metal gauge on request)
INSULATION CORE:	<ul style="list-style-type: none">Structural, web-oriented mineral fibre woolSecurely attached to the sheet steel shellDensity approx. 7 1/2lb/ft³, 8 3/4lb/ft³ available on requestMat: glass fibre mat SM60/10 as trickle protection
FIRE BEHAVIOUR:	<ul style="list-style-type: none">In accordance with EN 13501-1, Euroclass A2s1d0, non-combustible
STANDARDFARBEN:	<ul style="list-style-type: none">In accordance with BASIC colour range
PANEL CONNECTION:	<ul style="list-style-type: none">Tongue and groove system in which the panels interlink precisely with no thermal bridge.
VAPOUR DIFFUSION:	<ul style="list-style-type: none">For use as an exterior wall in heated buildings - due to the vapour-permeable inside cover - it is mandatory to obtain technical clarification from a building physicist in advance.
PANEL INSTALLATION:	<ul style="list-style-type: none">When working with our products, please follow our installation guidelines at www.brucha.com/downloads.

Acoustic wall – WP-A

Visible mounting



Exterior PROFILE options

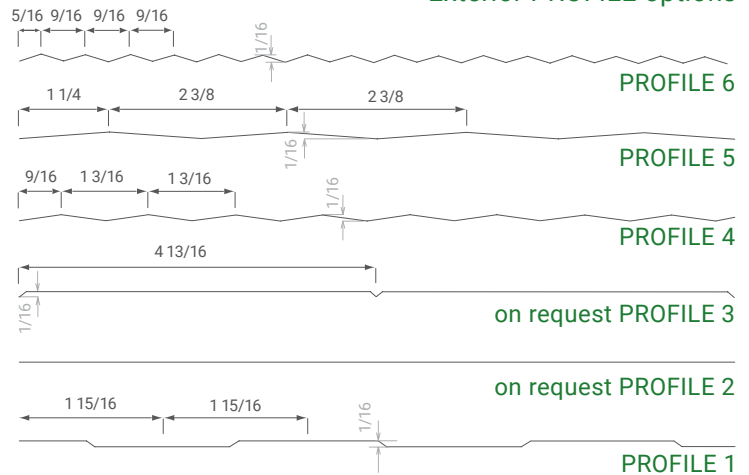

Panel type	WP-A 60	WP-A 80	WP-A 100	WP-A 120	WP-A 140	WP-A 150	WP-A 160	WP-A 180	WP-A 200	WP-A 240
Core thickness (inch)	2 1/2	3 1/8	4	4 1/2	5 1/2	6	6 1/2	7 1/8	8	9 2/4
R-Value ((sq ft • °F • hr)/ BTU; incl. joints)	8.1	10.9	13.9	16.2	18.9	19.6	21.0	23.7	25.5	31.5
Weight (lb/sq ft)	3.22	3.71	4.20	4.69	5.18	5.43	5.68	6.15	6.66	7.62
Fire resistance*	EI 30	EI 60	EI 90	EI 120	EI 120	EI 120	EI 120	EI 120	EI 120	EI 120

*Certificates must be checked for the usage case in question (horizontal/vertical/span width etc.).

Detail/joint geometry

Manufacturing tolerances:	In line with EN 14509
Manufacturing lengths:	Max. 51 1/5ft (extra-long transport from 44 5/8ft) ATTENTION! Danger of kinking due to heavy weight in the case of long panels!
Sound absorption coefficient α_w :	0.85 in line with test report MA39-VFA 2008-0448.01
Sound reduction index R_w dB:	~ 32
Sound-absorber class:	B
Approval:	Based on General building inspection approval Z-10.49-610

